

# Hilti S-BT Screw-in Studs

## Submission Folder

### Product Information

S-BT Screw-in Stud 2

Accessories 4

Technical Information and Method Statement 6

### Letters

Country of Origin 19



Recycling one ton of paper saves 17 trees and 7000 gallons of water.  
Please consider your environmental responsibility before using the hard copy version!

# Threaded screw stud (carbon steel) for multi-purpose fastenings on steel S-BT MF




## APPLICATIONS

- Fastening cable ladders using channels or hold-down / expansion guide clips
- Fastening cable trays and cable runs using channels or conduit clips
- Fastening junction boxes, switchgear and instrumentation panels directly or using channels
- Fastening light fixtures, signage, etc.
- Suitable for use on steel with a thickness of 6 mm (1/4") and greater

## ADVANTAGES

- The S-BT MF is easy to use and reliable – requires no electric supply cords or heavy equipment for installation
- Suitable for use in mildly corrosive environments (C3) on coated steel
- Easy installation in tight spaces
- No rework on coated steel
- No propellant required

Technical data	
Material composition	Carbon steel
Corrosion protection	Duplex coated
Environmental conditions	Outdoor, mildly corrosive
Max. tightening torque	8 Nm
Point type	Blunt tip
Base materials	Steel
Minimum thickness of base material (steel)	6 mm

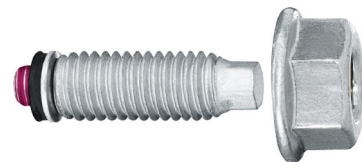

Ordering designation	Thickness fastened - max.	Sales pack quantity	Item number
S-BT MF M8/7 AN 6	7 mm	100 pc	2139174 <sup>1)</sup>
S-BT MF M8/15 AN 6	15 mm	100 pc	2148618 <sup>1)</sup>
S-BT MF M10/15 AN 6	15 mm	100 pc	2140528 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Threaded screw stud (stainless steel) for multipurpose fastenings S-BT MR

### APPLICATIONS


- Fastening cable ladders using channels or hold-down / expansion guide clips
- Fastening cable trays and cable runs using channels or conduit clips
- Fastening junction boxes, switchgear and instrumentation panels directly or using channels
- Fastening lighting fixtures, signage
- Designed for use on steel with a thickness of 6 mm or greater

### ADVANTAGES

- The S-BT MR is easy to use and reliable – requires no electric supply cords or heavy equipment for installation
- Suitable for use in highly corrosive environments (C4 and C5) on coated steel
- Easy installation in tight spaces
- No rework on coated steel
- High corrosion resistance and thus suitable for most marine, offshore, petrochemical and power plant applications

### Technical data

<b>Material composition</b>	Stainless steel
<b>Corrosion protection</b>	Stainless steel, equivalent to SS316
<b>Environmental conditions</b>	Marine, offshore, petrochemical, power plants, etc.
<b>Max. tightening torque</b>	8 Nm
<b>Point type</b>	Blunt tip
<b>Base materials</b>	Steel
<b>Minimum thickness of base material (steel)</b>	7 mm

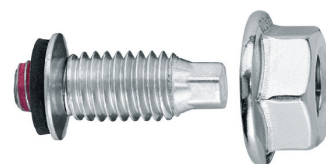
[Order Now](#)

[Watch Video](#)


Ordering designation	Thickness fastened - max.	Sales pack quantity	Item number
<b>S-BT MR M8/7 SN 6</b>	7 mm	100 pc	<b>2139172<sup>1)</sup></b>
<b>S-BT MR M8/15 SN 6</b>	15 mm	100 pc	<b>2148612<sup>1)</sup></b>
<b>S-BT MR M10/15 SN 6</b>	15 mm	100 pc	<b>2140740<sup>1)</sup></b>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products



## Setting equipment for S-BT

Ordering designation		Sales pack quantity	Item number
<b>Cordless drill SF BT 22-A</b>		1 pc	<b>2123719<sup>1)</sup></b>
<b>Stepped drill bit TS-BT 5.5-74 S</b>		1 pc	<b>2143137<sup>1)</sup></b>
<b>Depth gauge S-DG BT M8/7 Short 6</b>		1 pc	<b>2143260<sup>1)</sup></b>
<b>Depth gauge S-DG BT M8/15 Long 6</b>		1 pc	<b>2148575<sup>1)</sup></b>
<b>Depth gauge S-DG BT M10-W10/15 Long 6</b>		1 pc	<b>2143261<sup>1)</sup></b>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Fastening grating / checker plate

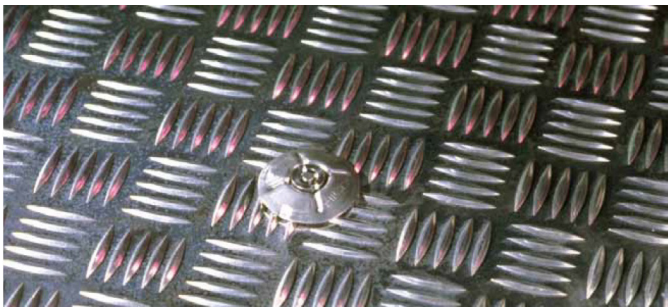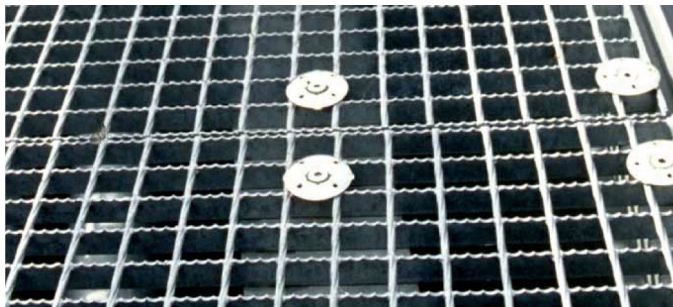

### APPLICATIONS

- Fastening gratings and industrial flooring on metal profiles (thickness at least 6 mm)
- Suitable for industrial buildings and power plants, shipbuilding, food-processing industry, chemicals and oil industry, steel and metal construction trades, public buildings

### ADVANTAGES

- Quick and easy to install: Up to 120 fastenings per hour
- Trouble-free, one-man operation
- Versatile and mobile: No external power source required
- Secure: Verified holding power, highly ductile nails
- Also available in stainless steel

## Grating disc X-FCM-M



**Order Now**



Ordering designation	Base materials	Diameter	Environmental conditions	Fastener shank length	Grating height	Sales pack quantity	Item number
<b>X-FCM-M 25/30</b>	Steel	50 mm	Indoors, dry and non-corrosive environment	23 mm	25 - 30 mm	100 pc	<b>2117357<sup>1)</sup></b>
<b>X-FCM-M 35/40</b>	Steel	50 mm	Indoors, dry and non-corrosive environment	33 mm	35 - 40 mm	100 pc	<b>2117359<sup>1)</sup></b>
<b>X-FCM-M 45/50</b>	Steel	50 mm	Indoors, dry and non-corrosive environment	43 mm	45 - 50 mm	100 pc	<b>2117390<sup>1)</sup></b>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Grating disc (stainless steel) X-FCM-R

### APPLICATIONS

- Fastening gratings in corrosive environments such as marine, offshore, petrochemical, power plants etc.

### ADVANTAGES

- Stainless steel discs



**Order Now**



Ordering designation	Base materials	Diameter	Environmental conditions	Grating height	Sales pack quantity	Item number
<b>X-FCM-R 25/30</b>	Steel	50 mm	Marine, offshore, petrochemical, power plants, etc.	25 - 30 mm	100 pc	<b>247181<sup>1)</sup></b>
<b>X-FCM-R 35/40</b>	Steel	50 mm	Marine, offshore, petrochemical, power plants, etc.	35 - 40 mm	100 pc	<b>247182<sup>1)</sup></b>
<b>X-FCM-R 45/50</b>	Steel	50 mm	Marine, offshore, petrochemical, power plants, etc.	45 - 50 mm	100 pc	<b>247183<sup>1)</sup></b>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

Checker plate fastener HDG X-FCP-F

APPLICATIONS

- Fastening checker plate in mildly corrosive environments (not for off-shore use!)

ADVANTAGES

- Duplex coated discs



Order Now



Ordering designation	Base materials	Diameter	Environmental conditions	Grating height	Sales pack quantity	Item number
X-FCP-F 5/10	Steel	45 mm	Indoors or mildly corrosive environment	5 - 13 mm	200 pc	308859 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

Checker plate fastener (stainless steel) X-FCP-R

APPLICATIONS

- Fastening gratings in corrosive environments such as marine, offshore, petrochemical, power plants etc.

ADVANTAGES

- Stainless steel discs for high corrosion resistance



Order Now



Ordering designation	Base materials	Diameter	Environmental conditions	Grating height	Sales pack quantity	Item number
X-FCP-R 5/10	Steel	45 mm	Marine, offshore, petrochemical, power plants, etc.	5 - 13 mm	200 pc	308860 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

Sealing ring X-FCP



Order Now



Ordering designation	Diameter	Sales pack quantity	Item number
X-FCP	39 mm	200 pc	308856 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.


Please visit Hilti website for the latest item numbers and related products

# S-BT Screw-in stainless steel and carbon steel threaded stud


## Product data

### Dimension


S-BT-MR M10/15 SN6  
S-BT-MR MT M10/15 SN6\*)  
S-BT-MR M10/15 SN6 AL\*\*) S-BT-MF M10/15 AN6  
S-BT-MF MT M10/15 AN6  
S-BT-MR W10/15 SN6  
S-BT-MR W10/15 SN6 AL\*\*)

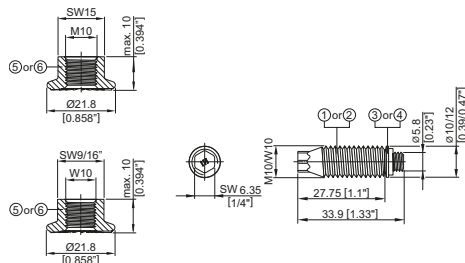

S-BT-MRM8/7 SN6  
S-BT-MRMT M8/7 SN6\*)  
S-BT-MRM8/7 SN6 AL\*\*) S-BT-MF M8/7 AN6  
S-BT-MF MT M8/7 AN6\*)  
S-BT-GFM8/7 AN6\*) S-BT-GFNG M8/7 SN6\*)  
S-BT-GRNG M8/7 SN6\*)  
S-BT-GRM8/7 SN6 AL\*\*) \*\*)

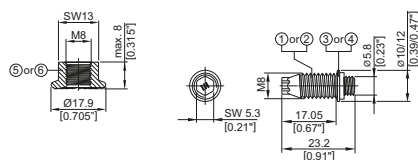

S-BT-MRM8/15 SN6  
S-BT-MRM8/15 SN6 AL\*\*) S-BT-MF M8/15 AN6

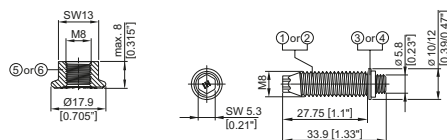

### Material specification

- ① Threaded shank: Stainless steel (S-BT-\_R)  
"S 31803 (1.4462)"
- ② Threaded shank: Carbon steel (S-BT-\_F)  
"1038/duplex-coated"
- ③ SN 12-R washers: Ø 12 mm [0.47"]  
Stainless steel (S-BT-\_R)  
"S 31635 (1.4404)"
- ④ AN10-F washers: Ø 10 mm [0.39"]  
Aluminum (S-BT-\_F)
- ⑤ Serrated flange nut\*): Stainless steel (S-BT-MR)  
grade A4 – 70/80
- ⑥ Serrated flange nut\*): Carbon steel (S-BT-MF)  
HDG, grade 8

Sealing ring of  
sealing washers: Chloroprene rubber  
CR 3.1107, black  
resistant to UV, salt water,  
water, ozone, oils, etc.

### Assessments, Reports and Type Approvals

ETA-20/0530  
ICC-ES ESR-4185  
ABS: 16-HS1550085-PDA  
DNV-GL: TAS00000N6  
LR: 16/00063  
BV: 45116/A BV  
Russian Maritime Register of Shipping:  
18.40040.250  
RINA: FPE278318CS  
China Classification Society CCS: NJ17P2016







\*) package does not include serrated flange nuts  
\*\*) for use in aluminum base material

## Applications

### Examples

Multipurpose Fastening	Grating with X-FCM X-FCM NG and X-FCS-R *)
S-BT-MR _____	S-BT-GR _____
S-BT-MF _____	S-BT-GF _____



\*) Load data, application requirements, corrosion information, fastener selection, system recommendation, material specification and coating refer to section X-FCM Grating Fastening System, X-FCM NG Grating Fastening System or X-FCS-R Grating Fastening System in the Hilti Direct Fastening Technology Manual.

## Load data

### Recommended loads

Base material thickness <sup>1)</sup>	S-BT-MR and S-BT-GR made of stainless steel				
	$t_{II} \geq 5 \text{ mm [0.20"]}$			$3 \text{ mm [0.12"]}$ $\leq t_{II} < 5 \text{ mm [0.20"]}$	
Base material type	Steel S235 A36	Steel S355, S420 Grade 50	Aluminum $f_u \geq 270 \text{ MPa}$	Steel S235 A36	Steel S355, S420 Grade 50
Tension, $N_{rec}$ [kN/lb]	1.9/425	2.3/515	1.9/425	1.8/405	2.1/470
Shear, $V_{rec}$ [kN/lb] For edge distance $6 \text{ mm [0.24"]} \leq c < 15 \text{ mm [0.59"]}$	2.5/560	2.8/625	2.9/650	2.4/540	2.5/560
Shear, $V_{rec}$ [kN/lb] For edge distance $c \geq 15 \text{ mm [0.59"]}$	4.0/895	4.0/895	3.5/785	3.8/850	3.8/850
Moment, $M_{rec}$ [Nm/lbft]	11.1/8.0				
Base material thickness <sup>1)</sup>	S-BT-MF and S-BT-GF made of duplex coated carbon steel				
	$t_{II} \geq 5 \text{ mm [0.20"]}$			$3 \text{ mm [0.12"]}$ $\leq t_{II} < 5 \text{ mm [0.20"]}$	
Base material type	Steel S235 A36	Steel S355, S420 Grade 50	Aluminum $f_u \geq 270 \text{ MPa}$	Steel S235 A36	Steel S355, S420 Grade 50
Tension, $N_{rec}$ [kN/lb]	2.0/450	2.4/540	n.a.	1.9/425	2.3/515
Shear, $V_{rec}$ [kN/lb] For edge distance $6 \text{ mm [0.24"]} \leq c < 15 \text{ mm [0.59"]}$	2.5/560	2.8/625	n.a.	2.4/540	2.5/560
Shear, $V_{rec}$ [kN/lb] For edge distance $c \geq 15 \text{ mm [0.59"]}$	2.7/605	2.9/650	n.a.	2.7/605	2.9/650
Moment, $M_{rec}$ [Nm/lbft]	6.7/5.0			6.7/5.0	

<sup>1)</sup> For base material thickness  $3 \text{ mm [0.12"]} \leq t_{II} < 6 \text{ mm [0.24"]}$  rework of the coating on the back side of the plate/profile may be needed.



## Design loads

	S-BT-MR and S-BT-GR made of stainless steel				
Base material thickness <sup>1)</sup>	t <sub>II</sub> ≥ 5 mm [0.20"]			3 mm [0.12"] ≤ t <sub>II</sub> < 5 mm [0.20"]	
Base material type	Steel S235 A36	Steel S355, S420 Grade 50	Aluminum f <sub>u</sub> ≥ 270 MPa	Steel S235 A36	Steel S355, S420 Grade 50
Tension, N <sub>Rd</sub> [kN/lb]	2.7/605	3.2/715	2.7/605	2.5/560	3.0/670
Shear, V <sub>Rd</sub> [kN/lb] For edge distance 6 mm [0.24"] ≤ c < 15 mm [0.59"]	3.5/785	3.9/875	4.0/895	3.4/760	3.5/785
Shear, V <sub>Rd</sub> [kN/lb] For edge distance c ≥ 15 mm [0.59"]	5.6/1255	5.6/1255	5.0/1120	5.3/1190	5.3/1190
Moment, M <sub>Rd</sub> [Nm/lbft]	15.6/12.0				
	S-BT-MF and S-BT-GF made of duplex coated carbon steel				
Base material thickness <sup>1)</sup>	t <sub>II</sub> ≥ 5 mm [0.20"]			3 mm [0.12"] ≤ t <sub>II</sub> < 5 mm [0.20"]	
Base material type	Steel S235 A36	Steel S355, S420 Grade 50	Aluminum f <sub>u</sub> ≥ 270 MPa	Steel S235 A36	Steel S355, S420 Grade 50
Tension, N <sub>Rd</sub> [kN/lb]	2.8/625	3.3/740	n.a.	2.7/605	3.2/715
Shear, V <sub>Rd</sub> [kN/lb] For edge distance 6 mm [0.24"] ≤ c < 15 mm [0.59"]	3.5/785	3.9/875	n.a.	3.4/760	3.5/785
Shear, V <sub>Rd</sub> [kN/lb] For edge distance c ≥ 15 mm [0.59"]	3.8/850	4.0/895	n.a.	3.8/850	4.0/895
Moment, M <sub>Rd</sub> [Nm/lbft]	9.4/7.0		n.a.	9.4/7.0	


<sup>1)</sup> For base material thickness  $3 \text{ mm [0.12"]} \leq t_{II} < 6 \text{ mm [0.24"]}$  rework of the coating on the back side of the plate/profile may be needed.

### Conditions for recommended loads and design loads:

- Use S-BT-MR and S-BT-MF (multipurpose fastening) only with the supplied Hilti serrated flange nuts M8, M10, W10 (⑤) or ⑥ as per according to General Information – Material specifications)
- Global factor of safety  $\Omega$  resp. partial factor of safety  $\gamma_m$  (based on 5 % fractile ultimate test value)

	Recommended loads	Design loads
static pull-out	2.80	2.00
static shear	2.80	2.00
Bending	1.75	1.25

- Minimum edge distance =  $6 \text{ mm [0.24"]}$ , minimum spacing  $\geq 18 \text{ mm [0.709"]}$
- Effect of base metal vibration and stress (e.g. areas with tensile stress) considered.
- Redundancy (multiple fastening) must be provided.
- If eccentric loading exists (e.g. use of an angle clip), moments caused by off-center loading must be considered.

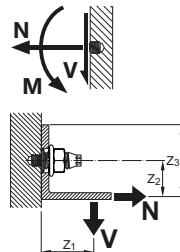



## Cyclic loading

S-BT threaded studs are only to be used for fastenings subject to static or quasi-static loading. Inquire at Hilti for test data if cyclic loading has to be considered in the design.

## Recommended interaction formula for combined loading

$$V-N \text{ (shear and tension)} \quad \frac{V}{V_{rec}} + \frac{N}{N_{rec}} \leq 1.0 \text{ with } \frac{V}{V_{rec}} \leq 1.0 \text{ and } \frac{N}{N_{rec}} \leq 1.0$$

$$V-M \text{ (shear and bending)} \quad \frac{V}{V_{rec}} + \frac{M}{M_{rec}} \leq 1.0 \text{ with } \frac{V}{V_{rec}} \leq 1.0 \text{ and } \frac{M}{M_{rec}} \leq 1.0$$

$$N-M \text{ (tension and bending)} \quad \frac{N}{N_{rec}} + \frac{M}{M_{rec}} \leq 1.0$$

$$V-N-M \text{ (shear, tension and bending)} \quad \frac{V}{V_{rec}} + \frac{N}{N_{rec}} + \frac{M}{M_{rec}} \leq 1.0$$

## Application Requirements


### Base material thickness $t_{li}$ and type of bore hole

S-BT-MR M8/7 SN 6  
S-BT-MR MT M8/7 SN 6  
S-BT-MR M8/7 SN 6 AL\*)  
S-BT-MF M8/7 AN 6  
S-BT-MF MT M8/7 AN 6  
S-BT-GR M8/7 SN 6  
S-BT-GR NG M8/7 SN 6\*)  
S-BT-GR M8/7 SN 6 AL\*)  
S-BT-GF M8/7 AN 6  
S-BT-GF NG M8/7 AN 6\*)

S-BT-MR M8/15 SN 6  
S-BT-MR M8/15 SN 6 AL\*)  
S-BT-MF M8/15 AN 6


S-BT-MR M10/15 SN 6  
S-BT-MR M10/15 SN 6 AL\*)  
S-BT-MF M10/15 AN 6  
S-BT-MR W10/15 SN 6  
S-BT-MR W10/15 SN 6 AL\*)  
S-BT-MF W10/15 AN 6

Pilot hole



Base material thickness  
steel and aluminum:  $t_{li} \geq 6 \text{ mm}$  [0.24"]

Drill through hole



Base material thickness  
steel:  $3 \text{ mm}$  [0.12"]  $\leq t_{li} < 6 \text{ mm}$  [0.24"]  
aluminum:  $5 \text{ mm}$  [0.20"]  $\leq t_{li} < 6 \text{ mm}$  [0.24"]

\*) for use in aluminum base material

Thickness of base material corrosion protection layer  $\leq 0.8 \text{ mm}$  [0.0315"].

For thicker coatings, please contact Hilti.


Base material  
corrosion protection  
layer



### Thickness of fastened material $t_l$

S-BT-\_\_\_\_/7\_\_\_\_  $1.6 \text{ mm } [0.063"] \leq t_l \leq 7.0 \text{ mm } [0.28"]$




S-BT-\_\_\_\_/15\_\_\_\_  $1.6 \text{ mm } [0.063"] \leq t_l \leq 15.0 \text{ mm } [0.59"]$



### Spacing & edge distances

Edge distance:  $\geq 6 \text{ mm } [0.24"]$

Spacing:  $\geq 18 \text{ mm } [0.709"]$  for all S-BT M8  
 $\geq 22 \text{ mm } [0.866"]$  for all S-BT M10  
 and S-BT W10



### Corrosion information

The S-BT stainless steel fasteners are made from the duplex stainless steel type 1.4462, which is equivalent to AISI 316 (A4) steel grade. This grade of stainless steel is classified in the corrosion resistance class IV according to DIN EN 1993-1-4:2015, which makes the material suitable for aggressive environments like in coastal and offshore applications.

The microstructures of duplex stainless steels consist of a mixture of austenite and ferrite phases. Compared to the austenitic stainless steel grades, duplex stainless steels are magnetic. The surface of the S-BT stainless steel fasteners is zinc-coated (anti-friction coating) in order to reduce the thread forming torque when the stud is screwed in into the base material.

The coating of the carbon steel S-BT fasteners consists of an electroplated Zn-alloy for cathodic protection and a top coat for chemical resistance (Duplex-coating). The thickness of the coating is 35  $\mu\text{m}$ . The use of this coating is limited to the corrosion category C1, C2 and C3 according the standard EN ISO 9223. For higher corrosion categories stainless steel fasteners should be used.

In case of a drill through hole or a pilot hole in thin base material, rework of the coating on the back side of the plate/profile may be needed.

**Note:** ETA-20/0530 allows the use of carbon steel threaded studs with duplex coating only in dry indoor environment (C1 acc. to EN ISO 9223).

	S-BT-MF, S-BT-GF		S-BT-MR, S-BT-GR	
Corrosivity category C	C3 medium corrosive		C5 very high corrosive	
Drill hole type and base material thickness $t_{  }^{1)}$	Topside protection	Backside protection	Topside protection	Backside protection
Drill through hole $3 \text{ mm } [0.12"] \leq t_{  } < 6 \text{ mm } [0.24"]$	✓	x <sup>2)</sup>	✓	x <sup>2)</sup>
Pilot hole $6 \text{ mm } [0.24"] \leq t_{  } < 7 \text{ mm } [0.28"]$	✓	✓	✓	✓ <sup>3)</sup>
Pilot hole $t_{  } \geq 7 \text{ mm } [0.28"]$	✓	✓	✓	✓

<sup>1)</sup> Real base material thickness, not nominal material thickness or material thickness with coating.

<sup>2)</sup> Damage of the coating on the back side of the plate/profile require a rework of the coating.

<sup>3)</sup> Damage of the coating on the back side of the plate/profile require a rework of the coating, if the drilling tools SF BT 22-A or SF BT 18-A were used for drilling the bore hole. If the drilling tool SBT 4-A22 was used for drilling the bore hole, no damage of the coating on the back side of the plate/profile will occur.

## Application limit


The base material is limited to steel grade with a maximum tensile strength  $f_u = 630 \text{ MPa } [91 \text{ ksi}]$ .

The minimum tensile strength of steel is  $f_u \geq 340 \text{ MPa } [49 \text{ ksi}]$ .

The minimum tensile strength of aluminum is  $f_u \geq 270 \text{ MPa } [39 \text{ ksi}]$ .

Minimum thickness of base material  $t_{||}$ : refer to section "Application Requirements"

Maximum thickness of base material  $t_{||}$ : no limits

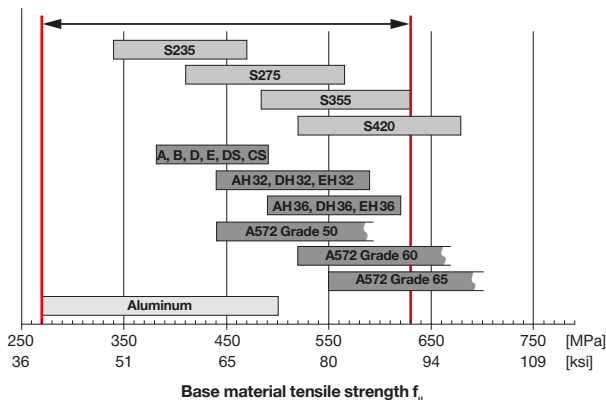

## Fastener selection and system recommendation

Fastener		Drilling tool	Drill bit	Setting tool	Depth gauge
Stainless steel	S-BT-MR M8/7 SN6	SBT 4-A22 or SF BT 18-A or SF BT 22-A	TS-BT 5.5-74 S	SBT 4-A22 or SF 4-A22 or SFC 18-A or SFC 22-A	S-DG BT M8/7 Short 6
	S-BT-MR MT 8/7 SN6		TS-BT 5.5-74 AL		
	S-BT-MR M8/7 SN6AL		TS-BT 5.5-74 S		
	S-BT-MR M8/15 SN6		TS-BT 5.5-74 AL		S-DG BT M8/15 Long 6
	S-BT-MR M8/15 SN6AL		TS-BT 5.5-74 S		
	S-BT-GR M8/7 SN6		TS-BT 5.5-74 AL		S-DG BT M8/7 Short 6
	S-BT-GR M8/7 SN6AL		TS-BT 5.5-110 S		
	S-BT-GR NG M8/7 SN6		TS-BT 5.5-74 S		
	S-BT-MR M10/15 SN6		TS-BT 5.5-74 AL		S-DG BT M10-W10/15 Long 6
	S-BT-MR MT M10/15 SN6		TS-BT 5.5-74 S		
	S-BT-MR M10/15 SN6AL		TS-BT 5.5-74 S		
S-BT-MR W10/15 SN6	TS-BT 5.5-74 AL				
S-BT-MR W10/15 SN6AL	TS-BT 5.5-110 S				
Carbon steel	S-BT-GF NG M8/7 AN6	TS-BT 5.5-74 S		S-DG BT M8/7 Short 6	
	S-BT-GF M8/7 AN6				
	S-BT-MF M8/7 AN6				
	S-BT-MF MT M8/7 AN6				
	S-BT-MF M8/15 AN6		S-DG BT M8/15 Long 6		
	S-BT-MF M10/15 AN6				
	S-BT-MF MT M10/15 AN6		S-DG BT M10-W10/15 Long 6		
	S-BT-MF W10/15 AN6				

## Fastener quality assurance



In order to ensure the exact screw-in depth and a proper compressed sealing washer, the S-BT studs have to be installed with the appropriate depth gauge. With this tool the screw-in depth can be adjusted in a range of 0 – 1.5 mm (3 steps, 0.5mm per step).

The S-CC BT calibration card is needed to check the initial stand-off of the S-BT stud and to adjust/calibrate the S-DG BT depth gauge. After finding the right adjustment level for the S-DG BT depth gauge, the gauge can be adjusted and the studs can be installed without additional check of the S-DG BT depth gauge.

The depth gauge has to be re-adjusted (calibrated) at following times:

- Start of the installation process
- Change of the working position (upwards, downwards, horizontal) and base material (thickness, strength, type)
- Installer change
- After each packaging respectively after the installation of 100 S-BT studs

The lifetime of the S-DG BT depth gauge is  $\geq 1000$  settings.

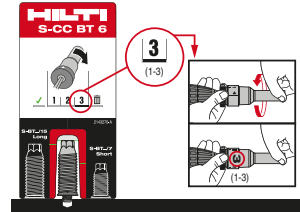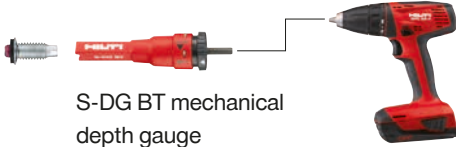

Design and functionality of the mechanical calibration card S-CC BT

### Fastening inspection

The installer is responsible for the correct setting of the S-BT studs. For the periodical verification of the correct stud stand-off the S-CG BT check gauge can be used.




Design and functionality of the check gauge S-CG BT

Verify stud stand-off  $h_{NVS}$  with check gauge S-CG BT

S-BT-\_\_\_/7\_\_\_6  $h_{NVS} = 18.6 \text{ mm to } 19.1 \text{ mm}$   
[0.732" to 0.752"]

S-BT-\_\_\_/15\_\_\_6  $h_{NVS} = 29.3 \text{ mm to } 29.8 \text{ mm}$   
[1.153" to 1.173"]



Designation	Product name	Comment
S-DG BT M8/7 Short 6	Depth gauge	for exact setting of S-BT M8/7
S-DG BT M8/15 Long 6	Depth gauge	for exact setting of S-BT M8/15
S-DG BT M10-W10/15 Long 6	Depth gauge	for exact setting of S-BT M10/W10
S-CC BT 6	Calibration card	for calibration of the depth gauge (short/long studs)
S-CG BT/7 Short 6	Check gauge	for verification of the stand-off for short studs (7 mm)
S-CG BT/15 Long 6	Check gauge	for verification of the stand-off for long studs (15 mm)


# Installation recommendation

## S-BT fasteners made of stainless steel with washer-Ø 12 mm (S-BT-\_R)

Fastened material hole Ø ≥ 13 mm [0.51"]

## S-BT fasteners made of carbon steel with washer-Ø 10 mm (S-BT-\_F)

Fastened material hole Ø ≥ 11 mm [0.43"]



### Important:

For group fastenings subjected to shear loading the fastened material hole diameter should not exceed 14 mm [0.55"] (S-BT-\_R) and 12 mm [0.47"] (S-BT-\_F) respectively.

1	2	3	4	5
Mark location for each fastening	Pre-drill with TS-BT stepped drill bit	Screw-in S-BT studs into drilled hole	Fasten channel on base material	Fasten accessory on channel
	<p>Usage of SBT 4-A22, SF BT 18-A or SF BT 22-A. Pre-drill until the shoulder grinds a shiny ring to assure proper drilling depth.</p> <p>Before fastener installation: The drilled hole and the area around the drilled hole must be clear of liquids and debris.</p>	<p>Usage of SBT 4-A22, SFC 18-A or SFC 22-A in combination with the calibrated depth gauge S-DG BT.</p> <p>Verify stud stand-off <math>h_{\text{res}}</math> with check gauge S-CG BT</p> <p>Sealing washer must be properly compressed!</p>	<p>Position channel on S-BT studs and hold in place. Tighten the nuts with the suited tightening torque <math>T_{\text{rec}}</math>.</p>	<p>Tighten the bolts with the suited tightening torque <math>T_{\text{rec}}</math> (see IFU of the Hilti wing nuts).</p>
<p><b>Important:</b> These are abbreviated instructions which may vary by application. ALWAYS review/follow the instructions for use (IFU) accompanying the product. In case of a drill through hole, rework of the coating on the back side of the plate/profile may be needed.</p>				

### Tightening torque for fastening to steel base material $t_{II} \geq 6 \text{ mm}$

	Fastener: S-BT-MF, S-BT-MR
Element: nut	8 Nm

### Tightening tool recommendation for tightening with cordless screwdriver

Cordless screwdriver	Clutch type (stop detection)	Gear	Clutch
SF 4-A22	TRC	1	8
SF 6-A22	ESC (HJ)	1	3
SF 6H-A22	ESC (HJ)	1	3
SBT 4-A22	TRC	1	7
SFC 18-A	TRC	1	5
SFC 22-A	TRC	1	5



- Tool power level adjustment:

Gear:



Clutch:



- The setting of the torque via the Hilti screwdriver with torque release coupling (TRC) can change as the clutch wears over time. The specified torque setting is only a rough guide value and applies to a new Hilti screwdriver. To ensure recommended torque is applied, Hilti recommends the use of a calibrated torque wrench or the Hilti torque tool.
- The specified torque setting for the Hilti screw drivers with electronic slip clutch (ESC) is only a rough guide value as the ESC has 2 stop detections; Soft Joint (SJ) detection and Hard Joint (HJ) detection. The hard joint detection is activated due to drop in speed (fast stop) and can lead to a torque spike. The installation torque may vary depending on the user and the application. To ensure recommended torque is applied, Hilti recommends the use of a calibrated torque wrench or the Hilti torque tool.

### Tightening tool recommendation for tightening with Hilti torque tool

Hilti torque tool
Torque tool X-BT 1/4" – 8 Nm



Tightening torque for fastening to aluminum base material and in steel base material  
 $3 \text{ mm} \leq t_{\text{II}} < 5 \text{ mm}$  (drill through hole)

	Fastener: S-BT-MF, S-BT-MR, S-BT-MR AL
Element: nut	5 Nm

Tightening tool recommendation for tightening with cordless screwdriver

Cordless screwdriver	Clutch type (stop detection)	Gear	Clutch
SF 2-A12	TRC	1	15
SF 2H-A12	TRC	1	15
SF 4-A22	TRC	1	4
SF 6-A22	ESC (HJ)	1	2
SF 6H-A22	ESC (HJ)	1	2
SBT 4-A22	TRC	1	5
SFC 18-A	TRC	1	4
SFC 22-A	TRC	1	4



- Tool power level adjustment:

Gear:



Clutch:



- The setting of the torque via the Hilti screwdriver with torque release coupling (TRC) can change as the clutch wears over time. The specified torque setting is only a rough guide value and applies to a new Hilti screwdriver. To ensure recommended torque is applied, Hilti recommends the use of a calibrated torque wrench or the Hilti torque tool.
- The specified torque setting for the Hilti screw drivers with electronic slip clutch (ESC) is only a rough guide value as the ESC has 2 stop detections; Soft Joint (SJ) detection and Hard Joint (HJ) detection. The hard joint detection is activated due to drop in speed (fast stop) and can lead to a torque spike. The installation torque may vary depending on the user and the application. To ensure recommended torque is applied, Hilti recommends the use of a calibrated torque wrench or the Hilti torque tool.

Tightening tool recommendation for tightening with Hilti torque tool

Hilti torque tool

Torque tool S-BT 1/4" – 5 Nm

	S-BT-MR, S-BT-MF, S-BT-GR, S-BT-GF				
Base material thickness	$t_{II} \geq 5 \text{ mm [0.20"]}$			3 mm [0.12"] $\leq t_{II} < 5 \text{ mm [0.20"]}$	
Base material type	Steel S235 A36	Steel S355 Grade 50	Aluminum $f_u \geq 270 \text{ MPa}$	Steel S235 A36	Steel S355 Grade 50
Tightening torque serrated flange nut $T_{rec}$ [Nm/lbft]	8/5.9	8/5.9	5/3.6	5/3.6	5/3.6

**Important:** The tightening torque ( $T_{rec}$ ) for the serrated flange nut is dependent on the stud type, the base material type and thickness, and the drill hole type. Exceeding the tightening torque ( $T_{rec}$ ) leads to damage of the S-BT stud's anchorage with negative impact on the load values and the sealing function.

## System program

Designation	Item no.	Product name	Comment	Application
S-BT-GF M8/7 AN6	2140527	Threaded stud	use with X-FCM grating disc	Grating
S-BT-GF NG M8/7 AN6	2302143	Threaded stud	use with X-FCM-M NG grating disc	Grating
S-BT-MF M8/7 AN6	2139174	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MF MT M8/7 AN6	2298450	Threaded stud	package does not include serrated flange nut	Multipurpose
S-BT-MF M8/15 AN6	2148618	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MF M10/15 AN6	2140528	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MF MT M10/15 AN6	2309240	Threaded stud	package does not include serrated flange nut	Multipurpose
S-BT-MF W10/15 AN6	2139173	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-GR M8/7 SN6	2140529	Threaded stud	use with X-FCM grating disc	Grating
S-BT-GR M8/7 SN6AL	2140742	Threaded stud	use with X-FCM grating disc	Grating
S-BT-GR NG M8/7 SN6	2302142	Threaded stud	use with X-FCM-R NG grating disc	Grating
S-BT-MR M8/7 SN6	2139172	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MR MT M8/7 SN6	2298451	Threaded stud	package does not include serrated flange nut	Multipurpose
S-BT-MR M8/7 SN6AL	2140743	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MR M8/15 SN6	2148612	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MR M8/15 SN6AL	2148614	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MR M10/15 SN6	2140740	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MR MT M10/15 SN6	2205156	Threaded stud	package does not include serrated flange nut	Multipurpose
S-BT-MR M10/15 SN6AL	2140744	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MR W10/15 SN6	2140741	Threaded stud	package includes serrated flange nut	Multipurpose
S-BT-MR W10/15 SN6AL	2140745	Threaded stud	package includes serrated flange nut	Multipurpose

Designation	Item no.	Product name	Comment	Application
TS-BT 5.5-74 S	2143137	Stepped drill bit	for base material steel	Grating
TS-BT 5.5-110 S	2201685	Stepped drill bit	For use in combination with the S-CS NG centering Spacer	
TS-BT 5.5-74 AL	2143138	Stepped drill bit	for base material aluminum	
S-CS NG	2310191	Centering Spacer	For perpendicular pilot hole drilling and precise location of studs	Grating
S-DG BT M8/7 Short 6	2279735	Depth gauge	for exact setting of the S-BT	
S-DG BT M10-W10/15 Long 6	2143261	Depth gauge	for exact setting of the S-BT	
S-DG BT M8/15 Long 6	2148575	Depth gauge	for exact setting of the S-BT	
S-CG BT/7 Short 6	2143262	Check gauge	for verification of the stud stand-off	
S-CG BT/15 long 6	2143263	Check gauge	for verification of the stud stand-off	
S-CC BT 6	2143270	Calibration card	for calibration of the depth gauge	
S-BT $\frac{1}{4}$ " – 5 Nm	2143271	Torque tool	manual torque tool (5 Nm)	
X-BT $\frac{1}{4}$ " – 8 Nm	2119272	Torque tool	manual torque tool (8 Nm)	
S-NS 13 C 95/3 $\frac{3}{4}$ "	2149244	Nut setter	for serrated flange nut M8	
S-NS 15 C 95/3 $\frac{3}{4}$ "	2149245	Nut setter	for serrated flange nut M10	
S-NS $\frac{9}{16}$ " C 95/3 $\frac{3}{4}$ "	2149246	Nut setter	for serrated flange nut W10	

Attn. : To whom it may concern

Date : 1 April 2025  
Ref. : 086/AM/SC/25

Subject : Country of Origin- Hilti S-BT Screw-in Studs

Dear Sir / Madam,

Enclosed please find the information of Hilti S-BT Screw-in Studs.

Brand Name : Hilti

Model Name : Hilti S-BT Screw-in Studs

Manufacturer : Hilti Corporation

Address of Manufacturer : FL-9494, Principality of Liechtenstein.

Supplier : Hilti (Hong Kong) Ltd

Address of Supplier : 701-704, 7/F, Tower A, Manulife Financial Centre,  
223 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Country of Origin : Liechtenstein

Should you have further questions, please do not hesitate to contact our Technical Representatives, Customer Service Hotline at 8228-8118, or email us at [hksales@hilti.com](mailto:hksales@hilti.com).

Yours faithfully,

*Spencer C.* 

Spencer Cheung  
Head of Product Leadership Strategy



## Hilti S-BT Screw-in Studs Job Reference

[illegible]