



Hilti HLD Light-Duty Anchor


Submission Folder

Product Information	2
Technical Data	3
Letters	
Country of Origin	6
Job Reference	7



Recycling one ton of paper saves 17 trees and 7000 gallons of water.
Please consider your environmental responsibility before using the hard copy version!

Light-duty anchor HLD

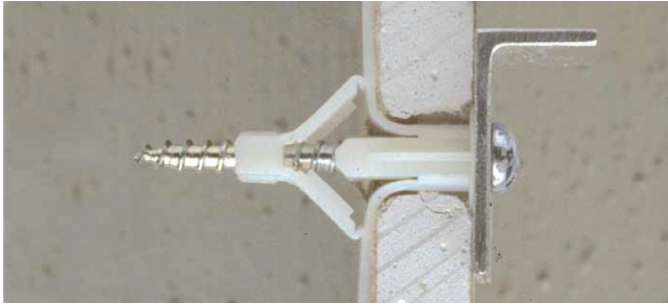

BASE MATERIALS


- Concrete (uncracked)
- Drywall
- Masonry (hollow)

APPLICATIONS

- Fastening on low-strength materials with cavities - for use with standard wood screws
- Anchoring in perforated brick or block, drywall, concrete

ADVANTAGES

- The wings spring out and adapt to all materials
- Three convenient sizes for use in a variety of hollow base materials from 1/4" drywall to hollow block
- Ribs on the body help prevent the anchor spinning during installation

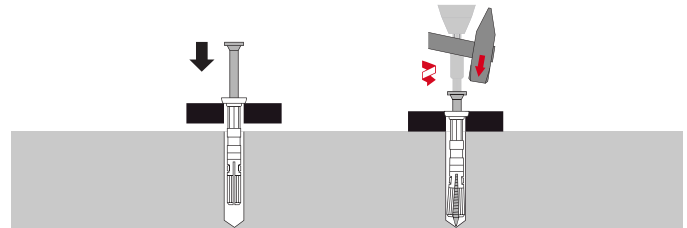

These are abbreviated instructions which may vary according to the application.

Technical data

Anchor type	Plastic anchor
Head configuration	Flat head, Round head
Material composition	Polyamide PA 6
Material, corrosion	Plastic
In-service temperature – range	-40 - 80 °C
Installation direction	Wall

Recommended load (kN), safety factor(γ)=5

Model	Size	Working principle	HLD 2	HLD 3	HLD 4
Concrete at 15N/mm²	Tensile Load, N _{rec}	C	0.25	0.40	0.50
	Shear Load, V _{rec}		0.25	0.40	0.50
Fibre reinforced gypsum panel 12.5mm	Tensile Load, N _{rec}	A	0.06	-	-
	Shear Load, V _{rec}		0.06	-	-
Fibre reinforced gypsum panel 2 x 12.5mm	Tensile Load, N _{rec}	A	-	0.12	-
	Shear Load, V _{rec}		-	0.12	-
Hollow brick	Tensile Load, N _{rec}	A / B	0.15	0.15	-
	Shear Load, V _{rec}		0.15	0.15	-

Remarks:

- 1) All the data applies to no edge distance, spacing and other influences
- 2) For detail design method, please refer to Fastening Technology Manual

Order Now



Ordering designation	Anchor size	Drill bit diameter	Drilling depth	Sales pack quantity	Item number
HLD 2	10 mm	10 mm	50 mm	150 pc	335506
HLD 3	10 mm	10 mm	56 mm	100 pc	335507
HLD 4	10 mm	10 mm	66 mm	100 pc	335508

Please visit Hilti website for the latest item numbers and related products

HLD Plastic anchors

Economical plastic anchor for drywall

Anchor version



HLD
(M10)

Benefits

- Plastic undercut anchor
- Simple setting
- Drywall application

Base material



Drywall

Basic loading data

All data in this section applies to:

- Correct setting (See setting instruction)
- No edge distance and spacing influence
- Base material as specified in the table
- Load data given in the tables is independent of load direction

Characteristic resistance

Anchor size	Anchoring principle ^{a)}		HLD 2	HLD 3	HLD 4
Gypsum board Thickness 12,5mm	B	F_{Rk} [kN]	0,4	0,4	0,4
Fibre reinforced gypsum board Thickness 12,5mm	A	F_{Rk} [kN]	0,3	-	-
Fibre reinforced gypsum board Thickness 2x12,5mm	A	F_{Rk} [kN]	-	0,6	-
Hollow clay brick	A / B	F_{Rk} [kN]	0,75	0,75	
Concrete \geq C16/20	C	F_{Rk} [kN]	1,25	2	2,5

a) See setting details

Design resistance

Anchor size			HLD 2	HLD 3	HLD 4
Anchoring principle ^{a)}					
Gypsum board Thickness 12,5mm	B	F_{Rd} [kN]	0,11	0,11	0,11
Fibre reinforced gypsum board Thickness 12,5mm	A	F_{Rd} [kN]	0,08	-	-
Fibre reinforced gypsum board Thickness 2x12,5mm	A	F_{Rd} [kN]	-	0,17	-
Hollow clay brick	A / B	F_{Rd} [kN]	0,21	0,21	-
Concrete \geq C16/20	C	F_{Rd} [kN]	0,35	0,56	0,70

a) See setting details

Recommended loads ^{b)}

Anchor size			HLD 2	HLD 3	HLD 4
Anchoring principle ^{a)}					
Gypsum board Thickness 12,5mm	B	F_{Rec} [kN]	0,08	0,08	0,08
Fibre reinforced gypsum board Thickness 12,5mm	A	F_{Rec} [kN]	0,06	-	-
Fibre reinforced gypsum board Thickness 2x12,5mm	A	F_{Rec} [kN]	-	0,12	-
Hollow clay brick	A / B	F_{Rec} [kN]	0,15	0,15	-
Concrete \geq C16/20	C	F_{Rec} [kN]	0,25	0,4	0,5

a) See setting details

b) With overall global safety factor $\gamma = 5$ to the characteristic loads and a partial safety factor of $\gamma = 1,4$ to the design value.

Materials

Material quality

Part	Material
Sleeve	Polyamide PA 6

Setting information

Installation temperature

-10°C to +40°C

Service temperature range

Hilti HLD universal anchor may be applied in the temperature range given below.

Temperature range	Base material temperature	Max. long term base material temperature	Max. short term base material temperature
Temperature range	-40 °C to +80 °C	+50 °C	+80 °C

Max short term base material temperature


Short-term elevated base material temperatures are those that occur over brief intervals, e.g. as a result of diurnal cycling.

Max long term base material temperature

Long-term elevated base material temperatures are roughly constant over significant periods of time.

Setting details

Anchor size		HLD 2	HLD 3	HLD 4
Nominal diameter of drill bit	d_o [mm]	10		
Depth of drill hole (only anchoring principle C)	$h_1 \geq$ [mm]	50	56	66
Screw length	(anchoring principle A/B)	l_s [mm]	$33 + t_{fix}$	$40 + t_{fix}$
	(anchoring principle C)	l_s [mm]	$40 + t_{fix}$	$49 + t_{fix}$
Screw diameter	(anchoring principle A/B)	d_s [mm]	4 - 5	
	(anchoring principle C)	d_s [mm]	5 - 6	
Wall / panel thickness	(anchoring principle A)	h [mm]	4 - 12	15 - 19
	(anchoring principle B)	h [mm]	12 - 16	19 - 25
	(anchoring principle C)	h	35	42
			50	

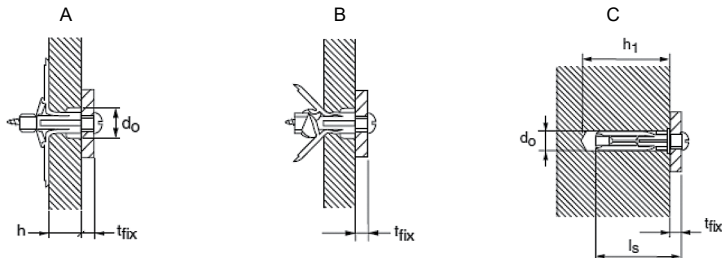

Installation equipment

Anchor size	HLD 2	HLD 3	HLD 4
Rotary hammer	TE 2- TE16		
Other tools	Screwdriver		

Setting instruction

*For detailed information on installation see instruction for use given with the package of the product.

Setting instruction	
1. Drill hole with drill bit	2. Install anchor
3. Install anchor	4. Drive in the screw

Attn. : To whom it may concern

Date : 1 April 2025
Ref. : 065/AM/SC/25

Subject : Country of Origin- Hilti HLD Light-Duty Anchor

Dear Sir / Madam,

Enclosed please find the information of Hilti HLD Light-Duty Anchor.

Brand Name : Hilti

Model Name : Hilti HLD Light-Duty Anchor

Manufacturer : Hilti Corporation

Address of Manufacturer : FL-9494, Principality of Liechtenstein.

Manufacturer Contact Person : Spencer Cheung

Supplier : Hilti (Hong Kong) Ltd

Address of Supplier : 701-704, 7/F, Tower A, Manulife Financial Centre,
223 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Supplier Contact Person : Spencer Cheung (+852 9732 1231)

Country of Origin : Germany

Should you have further questions, please do not hesitate to contact our Technical Representatives, Customer Service Hotline at 8228-8118, or email us at hksales@hilti.com.

Yours faithfully,

Spencer C. 

Spencer Cheung
Head of Product Leadership Strategy

[illegible]