

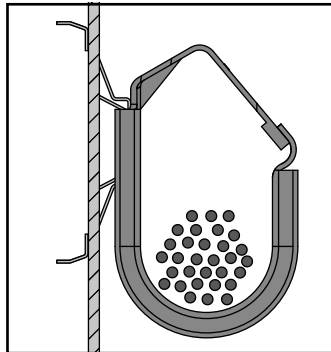
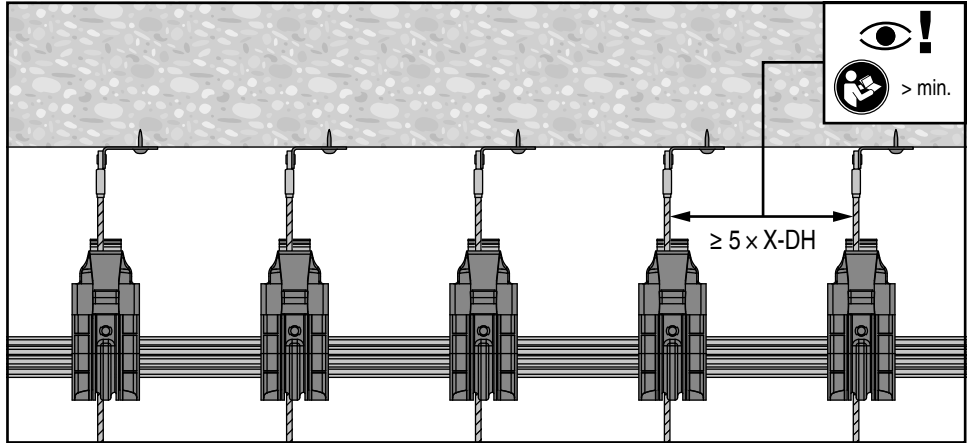
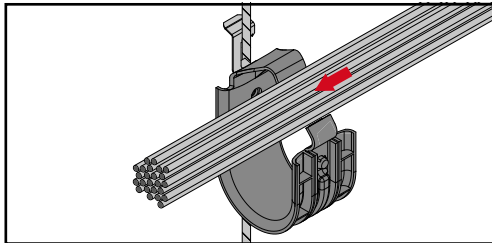


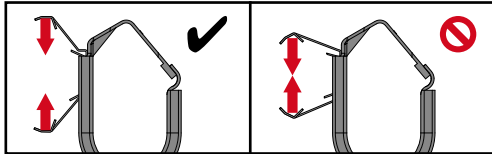

X-DH ... BW Data Hook

2259235 A1-11.2019


 Load rating: [30lbs]. Corresponds with mechanical strength according to UL Standard for Hardware for the Support of Conduit Tubing and Cable, UL2239; Suitable for use in Air Handling Spaces (plenums) in accordance with Section 300.22 (C) and (D) of the National Electrical Code, and Rules 12-010 (3), (4), and (5), and 12-020 of the Canadian Electrical Code, Part I. Mounting orientation: Vertical.

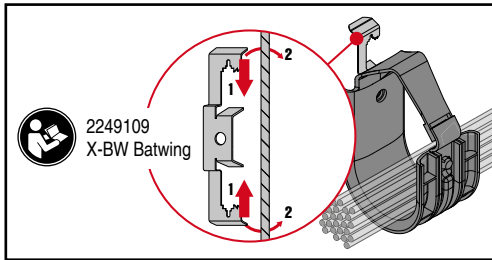

Cable Type	X-DH 1"	X-DH 2"	X-DH 4"
CAT 5e	30	95	360
CAT 6	20	70	260
CAT 6a	12	40	155
CAT 7a	10	35	125

Cable capacity is calculated based on a 70% fill rate.